



Customer information packet

VEM3713T

52M 2P TEFC VER 215TC SUPER E
ELECTRIC MOTOR WHOLESale.COM
Class - None
Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	215TC
Frame Material	Steel
Frequency	60.00 Hz
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
XP Class and Group	None
XP Division	Not Applicable
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	No Mounting
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	36.800 A @ 208.0 V 34.000 A @ 230.0 V 17.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	B
Type	AC
Mech. spec.	37H329
Base	
Status	PRD/A
Elec. spec.	37WGR228
Layout	37LYH329
Eff. date	07-02-2020
CD Diagram	CD0180
Poles	02
Leads	9#14
Proprietary	False
Created date	03-14-2019

High Voltage Full Load Amps	17.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3752M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	21.26 IN
Power Factor	89
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA

CAT.NO.	VEM3713T									
SPEC	37H329R228G1									
HP	15									
VOLTS	230/460									
AMPS	34/17									
RPM	3500									
FRAME	215TC		HZ	60		PH	3			
SF	1.15	CODE	J	DES	A	CLASS	F			
NEMA NOM. EFF	91	PF	89							
RATING	40C AMB-CONT									
CC	010A	USABLE AT 208V					36.8			
ENCL	TEFC	SER								
DE	6307		ODE	6206						
VPWM INVERTER READY										
CT6-60H(10:1)VT3-60H(20:1										
	50HZ 15HP 190/380V 40.8/20.4A									

Parts list

Part number	Description	Quantity
SA367720	SA 37H329R228G1	1.000 ea
RA357196	RA 37H329R228G1	1.000 ea
37FN3002B01	EXFN, PLASTIC, 7.50 OD, 1.155 ID	1.000 ea
HW3200A01	3/8-16X3/4 I-BLT WELDED F/S	1.000 ea
37CB3006	37 CB CASTING W/1.38 LEAD HOLE @ 6:00	1.000 ea
37GS1000SP	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
37EP3101A01	FR ENDPLATE, FOR ROUTING PURPOSES	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 ea
37PE3300A01	PUEP ASSEMBLY FOR ROUTING	1.000 ea
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 ea
10XN2520A30	HEX HD CAP SCREW-STD THD-.25 X 20 THD PE	4.000 ea
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 ea
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 ea
51XB1214A20	12-14X1.25 HXWSSLD SERTYB	1.000 ea
07FH4007SP	PRIMED	1.000 ea
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 ea
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 ea
37GS1008	37 GS FOR CB LID - LEXIDE	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 ea
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 ea
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
LB1115N	LABEL,LIFTING DEVICE (ON ROLLS)	1.000 ea
MJ1000A02	GREASE, MOBIL POLYREX EM - 124047	0.050 lb
MG1000Y03	MUNSELL 2.53Y 6.70/ 4.60, GLOSS 20,	0.028 ga
HA3104A25	THRUBOLT .31-18 X 14.75	4.000 ea
LB1119N	WARNING LABEL	1.000 ea
LC0181	CONNECTION LABEL	1.000 ea

NP3441LUA	ALUM SUPER-E VPWM INV READY UL CSA-EEV C	1.000 ea
37PA1074	PALLET PACK GRP, PRINT BOX PK1026A06	1.000 ea
PK3082	STYROFOAM CRADLE	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (1200/bx) 3/19	1.000 ea

AC Induction Motor Performance Data

Record # 53380

Typical performance - not guaranteed values

Winding: 37WGR228-R023			Type: 3752M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		15		Full Load Torque		22.12 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		34/17		Breakdown Torque		103 LB-FT	
R.P.M.		3500		Pull-up Torque		40.16 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		57.59 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		150 A
Service Factor (S.F.)		1.15		No-load Current		5.55 A	
NEMA Nom. Eff.		91	Power Factor	89	Line-line Res. @ 25°C		0.47 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		68°C	
S.F. Amps				Temp. Rise @ S.F. Load		79°C	
				Locked-rotor Power Factor		30.9	
				Rotor inertia		0.474 LB-FT2	

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	78	85	89	90	90	89
Efficiency	86.8	91	91.9	91.4	90.8	89.8	91.3
Speed	3579	3557	3534	3500	3484	3456	3495
Line amperes	6.7	9.57	13.19	17.03	21.12	25.61	19.5


ABB Motors and Mechanical Inc.

WINDING # 37WGR228

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 3500 RPM 460 V 3752M

TORQUES (LB-FT): PO=103 PU=40.16 LR=57.59 LRA=150

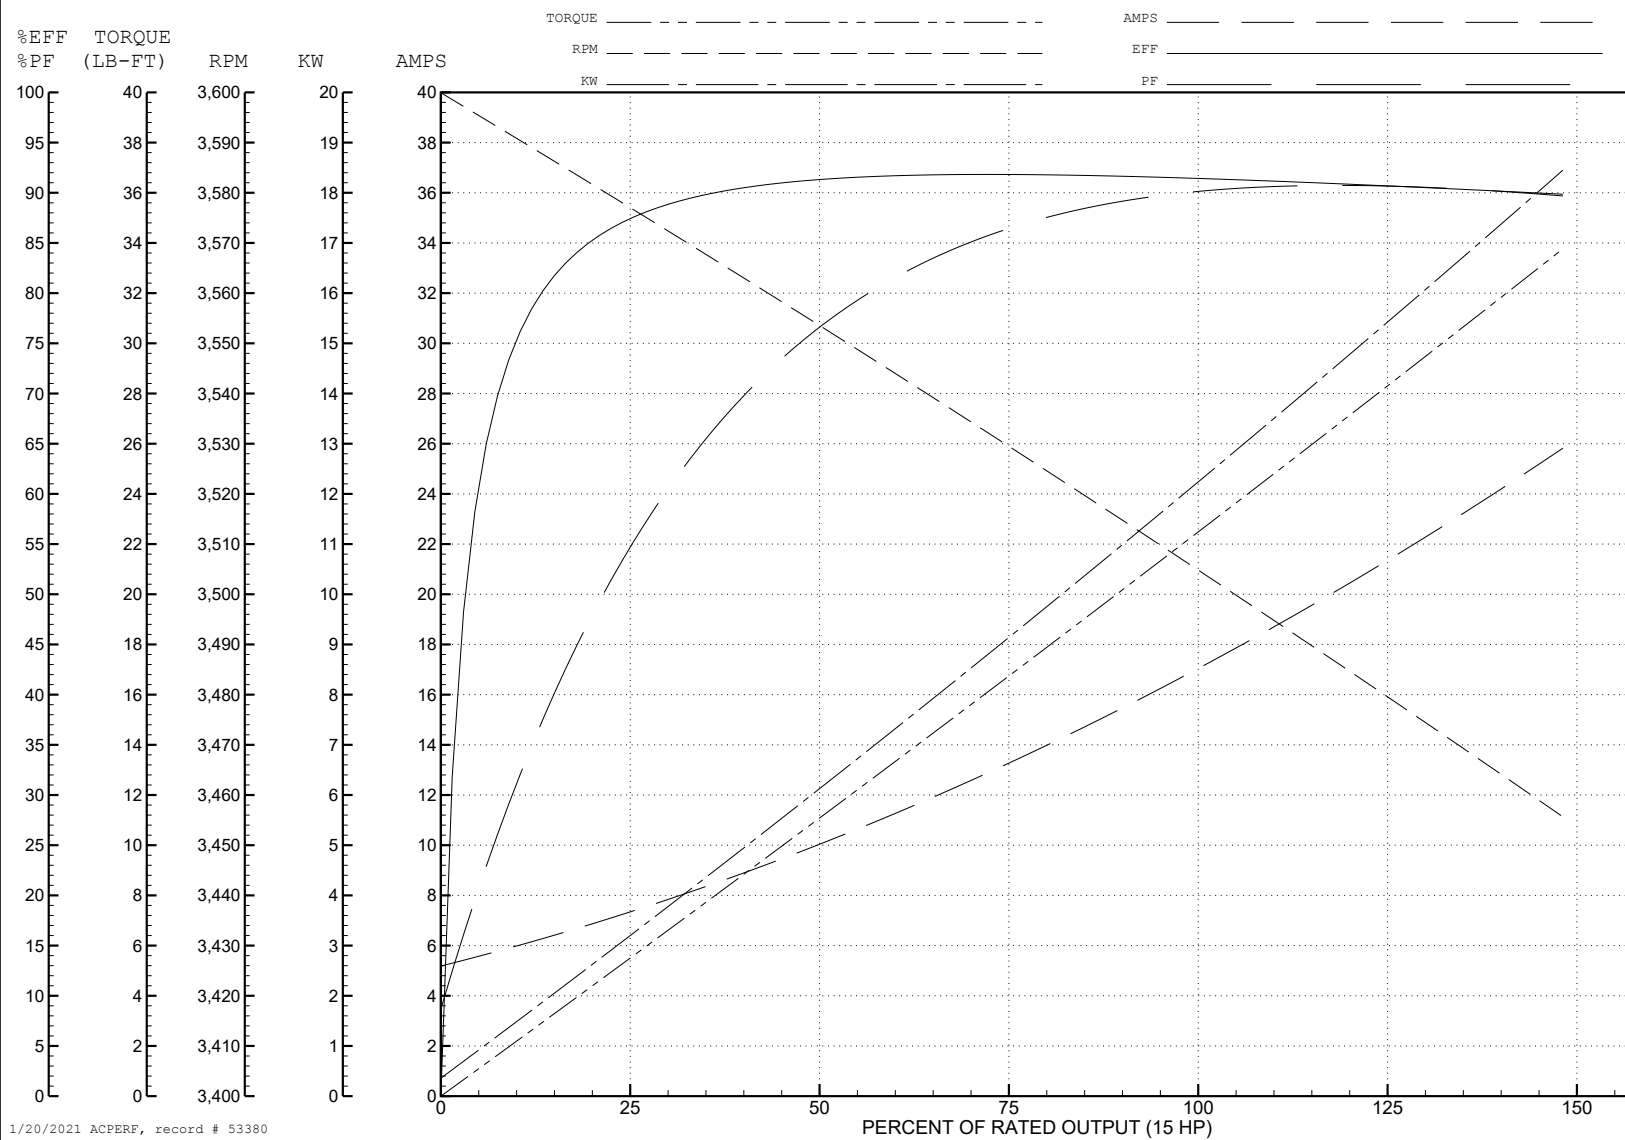

AC Induction Motor Performance Data

Record # 57899

Typical performance - not guaranteed values

Winding: 37WGR228-R023			Type: 3752M		Enclosure: TEFC			
Nameplate Data			230 V, 60 Hz: Low Voltage Connection					
Rated Output (HP)		15	Full Load Torque		22.1 LB-FT			
Volts		230/460	Start Configuration		direct on line			
Full Load Amps		34/17	Breakdown Torque		104 LB-FT			
R.P.M.		3500	Pull-up Torque		40.3 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		57.8 LB-FT		
NEMA Design Code		A	KVA Code	J	Starting Current		300 A	
Service Factor (S.F.)		1.15	No-load Current		11.1 A			
NEMA Nom. Eff.		91	Power Factor		89	Line-line Res. @ 25°C		0.111 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		67°C	
S.F. Amps					Temp. Rise @ S.F. Load		82°C	
					Locked-rotor Power Factor		30.3	
					Rotor inertia		0.474 LB-FT2	

Load Characteristics 230 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	85	89	90	90	90
Efficiency	86.8	91.1	92	91.8	91	90	91.3
Speed	3579	3558	3534	3510	3485	3456	3495
Line amperes	13.4	19.1	26.4	34	42.2	51.2	38.9


ABB Motors and Mechanical Inc.

WINDING # 37WGR228

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 3500 RPM 230 V 3752M

TORQUES (LB-FT): PO=104 PU=40.3 LR=57.8 LRA=300

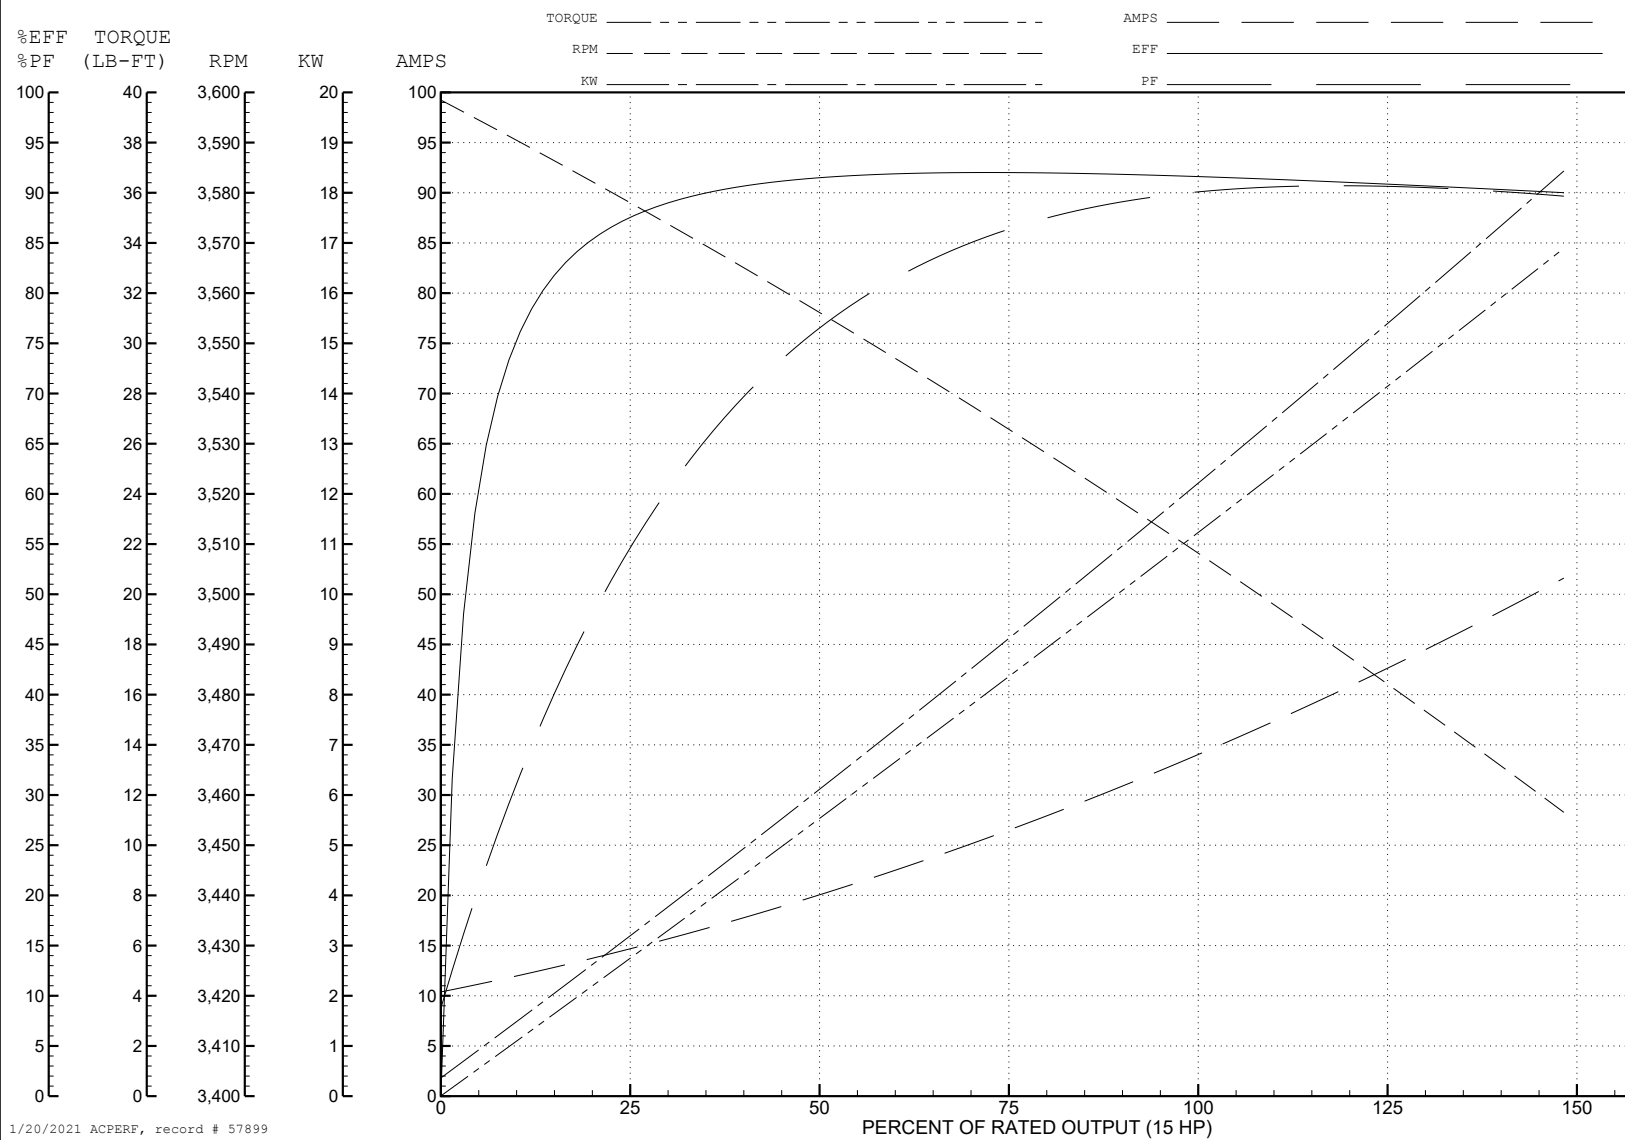

AC Induction Motor Performance Data

Record # 70097

Typical performance - not guaranteed values

Winding: 37WGR228-RXXX				Type: 3752M		Enclosure: TEFC	
Nameplate Data				380 V, 50 Hz: High Voltage Connection			
Rated Output (HP)		15		Full Load Torque		17.68 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		34/17		Breakdown Torque		98.71 LB-FT	
R.P.M.		3500		Pull-up Torque		42.31 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		60.68 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		146 A
Service Factor (S.F.)		1.15		No-load Current		5.43 A	
NEMA Nom. Eff.		91	Power Factor	89	Line-line Res. @ 25°C		0.47 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		52°C	
S.F. Amps				Temp. Rise @ S.F. Load		63°C	
				Locked-rotor Power Factor		34.6	
				Rotor inertia		0.474 LB-FT2	

Load Characteristics 380 V, 50 Hz, 10 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	73	82	87	89	90	88
Efficiency	81.7	88	89.8	89.9	89.6	88.9	89.7
Speed	2982	2964	2945	2918	2905	2883	2910
Line amperes	6.27	8.45	11.29	14.27	17.46	20.98	16.2


ABB Motors and Mechanical Inc.

WINDING # 37WGR228

Typical performance - not guaranteed values.

10 HP 3 PH 50 HZ 3500 RPM 380 V 3752M

TORQUES (LB-FT): PO=98.71 PU=42.31 LR=60.68 LRA=146

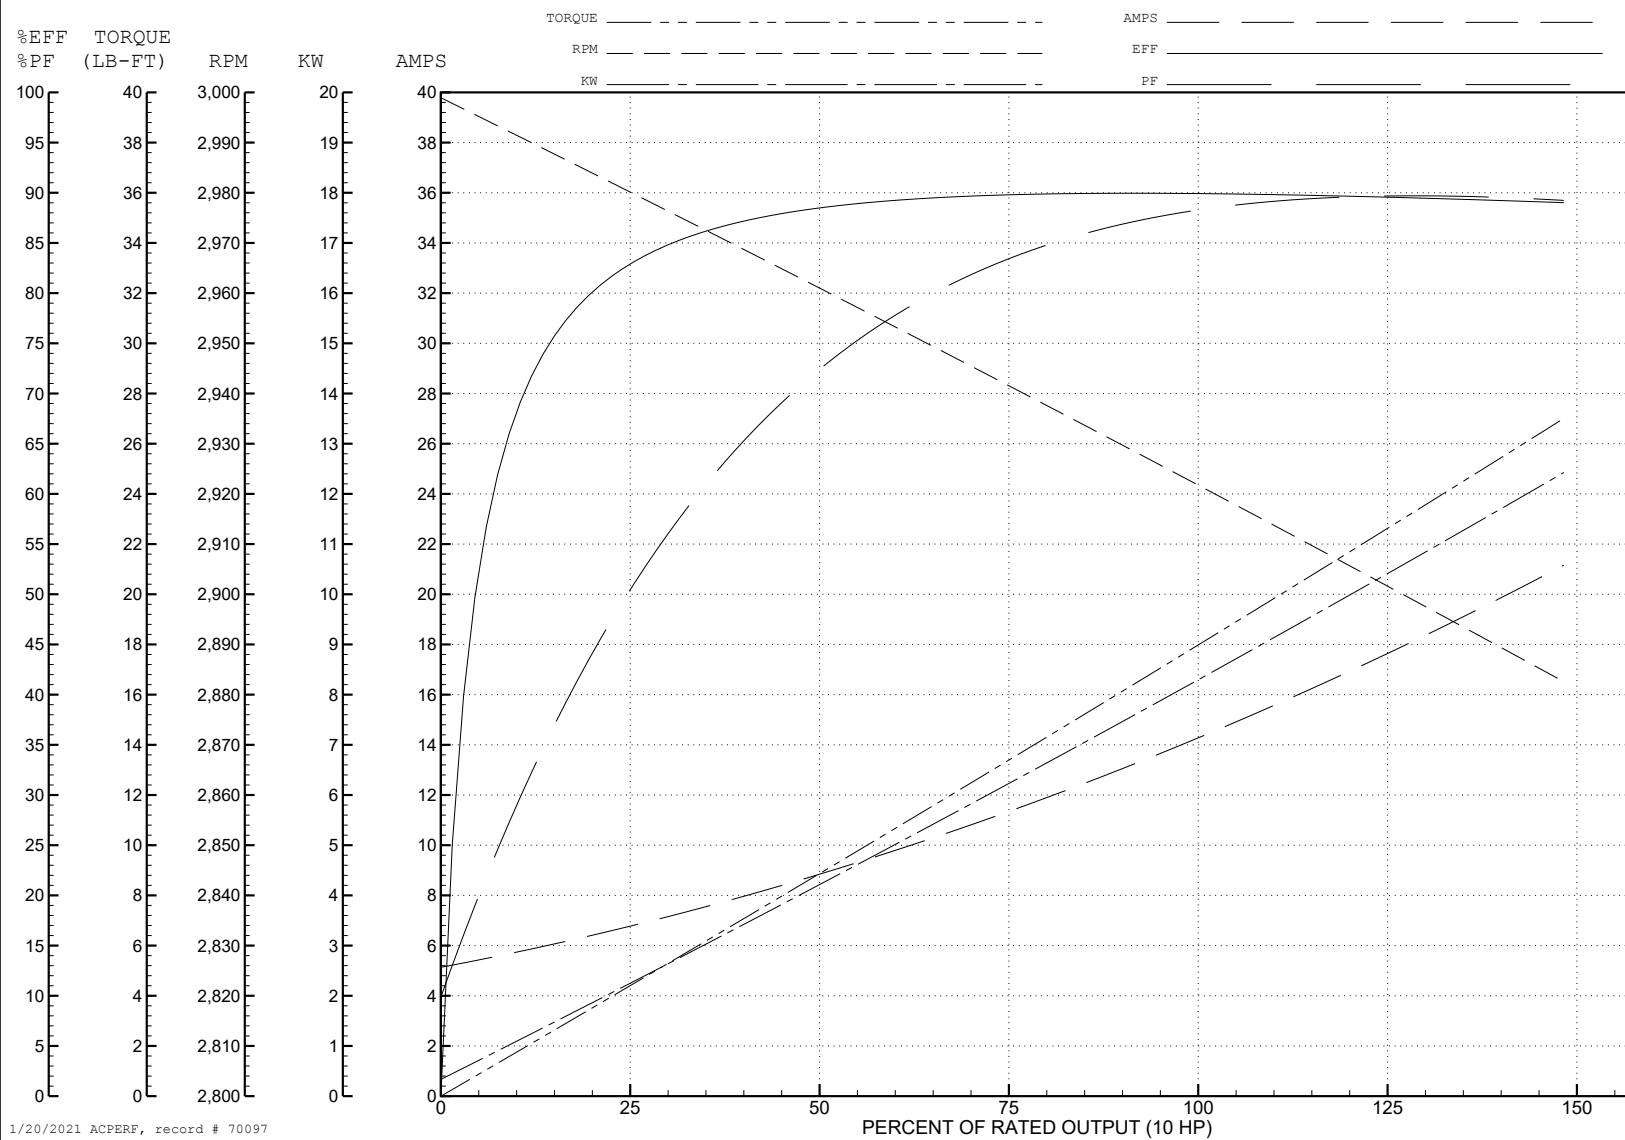

AC Induction Motor Performance Data

Record # 73419

Typical performance - not guaranteed values

Winding: 37WGR228-RXXX				Type: 3752M		Enclosure: TEFC	
Nameplate Data				480 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		15		Full Load Torque		22.12 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		34/17		Breakdown Torque		113 LB-FT	
R.P.M.		3500		Pull-up Torque		44.76 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		64.18 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		159 A
Service Factor (S.F.)		1.15		No-load Current		6.32 A	
NEMA Nom. Eff.		91	Power Factor	89	Line-line Res. @ 25°C		0.47 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		67°C	
S.F. Amps				Temp. Rise @ S.F. Load		83°C	
				Locked-rotor Power Factor		31.2	
				Rotor inertia		0.474 LB-FT2	

Load Characteristics 480 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	50	72	82	86	88	89	87
Efficiency	86.2	90.7	91.8	91.5	90.9	90.1	91.1
Speed	3580	3560	3538	3506	3491	3465	3497
Line amperes	7.28	9.85	13.18	16.77	20.58	24.75	19.1


ABB Motors and Mechanical Inc.


WINDING # 37WGR228

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 3500 RPM 480 V 3752M

TORQUES (LB-FT): PO=113 PU=44.76 LR=64.18 LRA=159

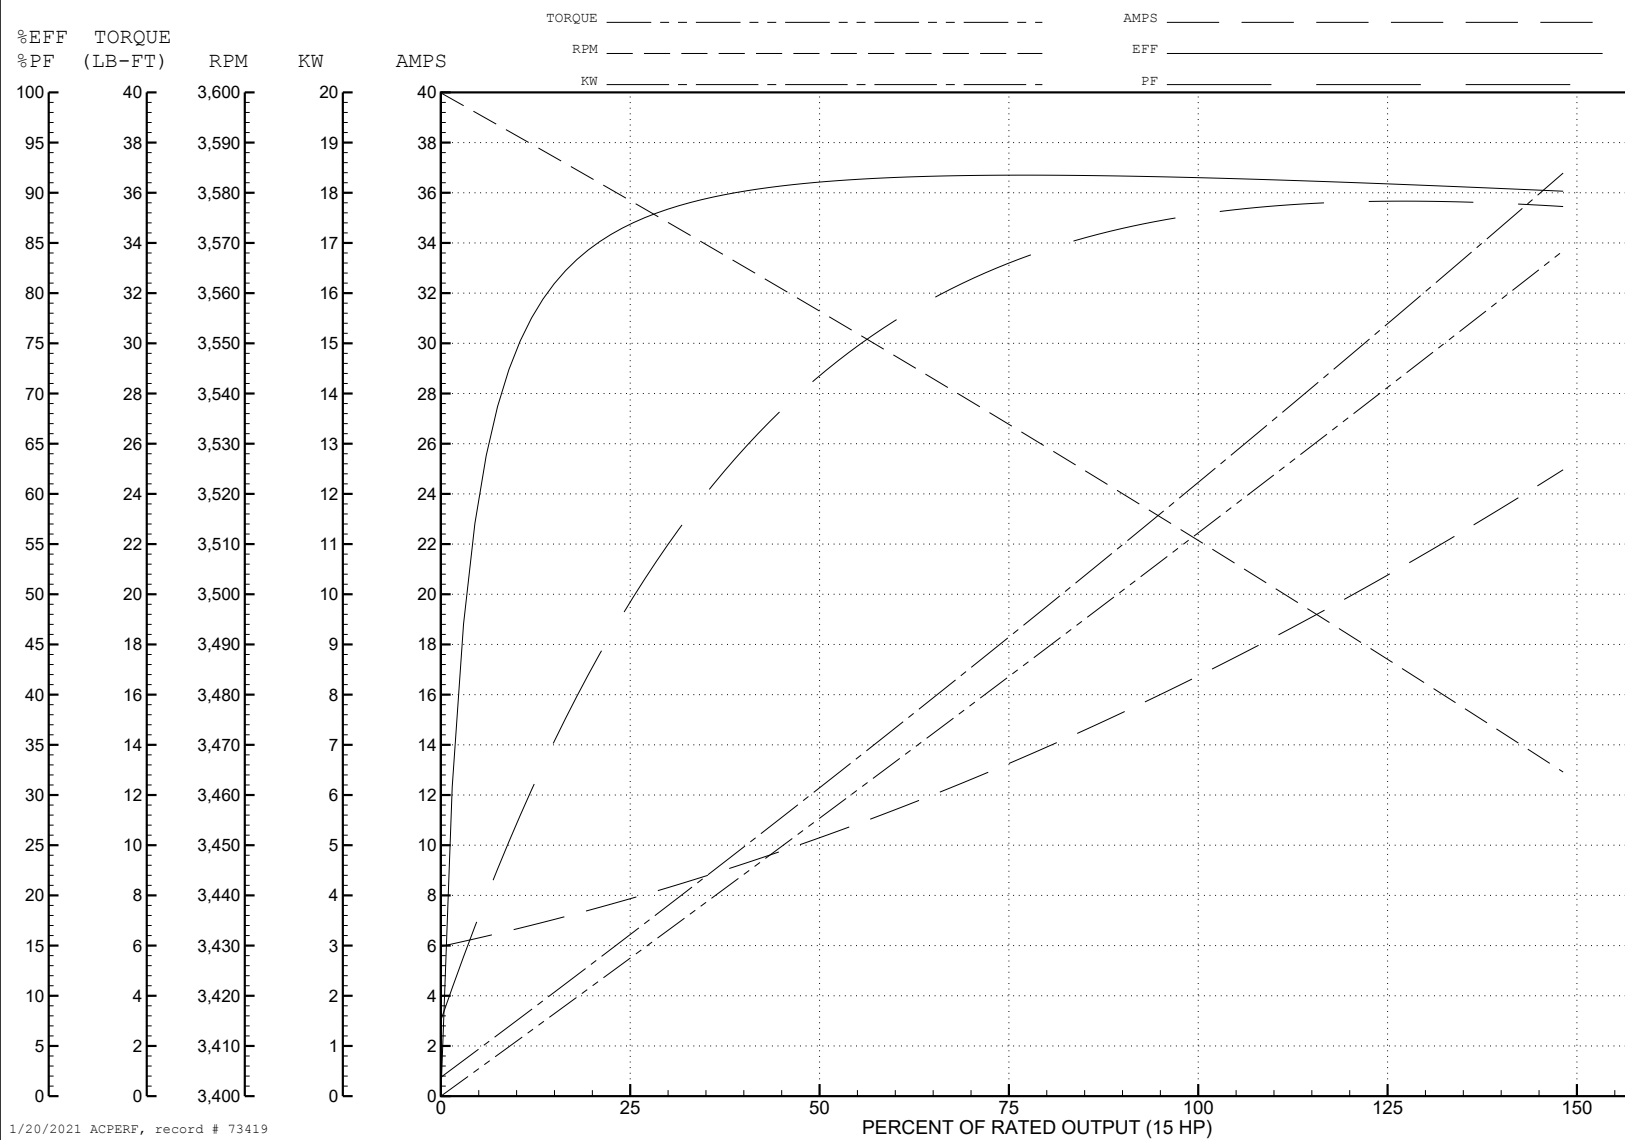

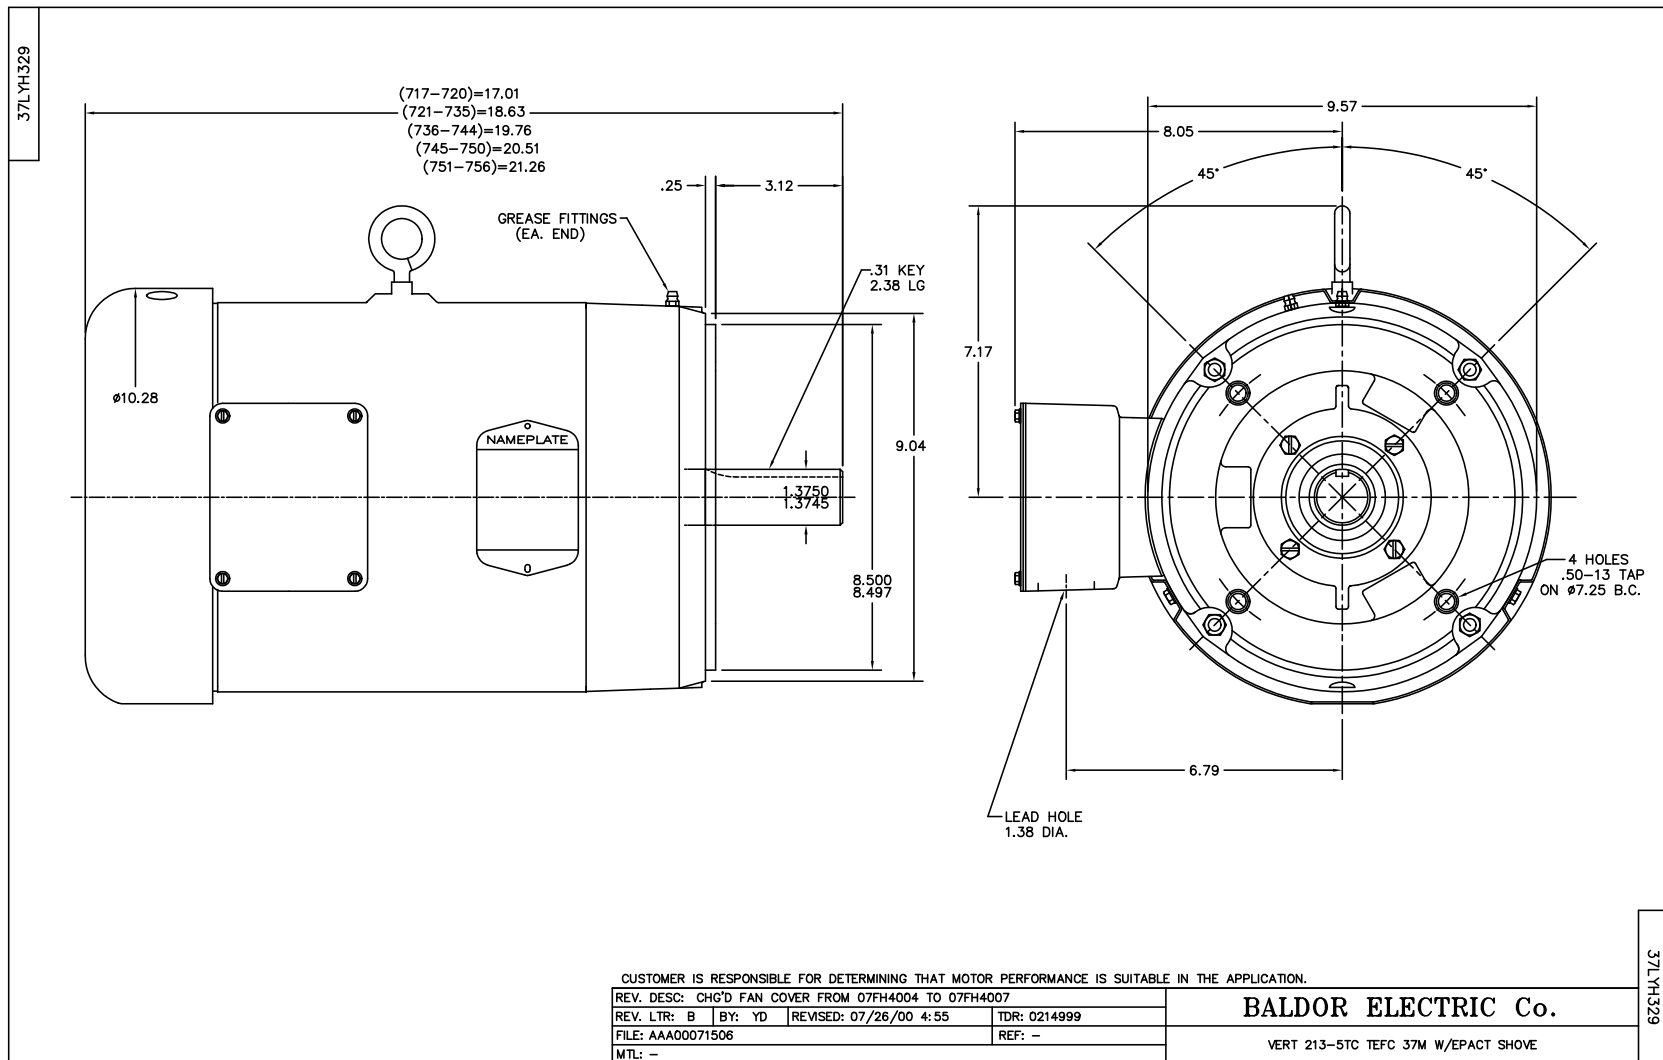

CD0180

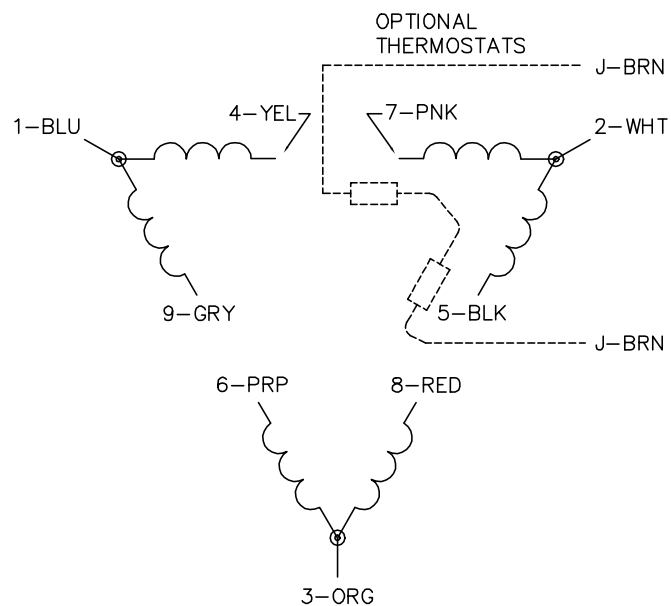LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1