

# ODP-2-34110-3KF42-MN

Optidrive P2 VFD Datasheet

**11 kW, 24 A, 380-480 V, 3PH**

IP20 Variable Frequency Drive with EMC Filter and TFT Display



## Input Ratings

Supply Voltage	380-480 V
Input Phases	3
Supply Current Continuous	28.9 A
Supply Fuse or MCB (Type B)	40 A

## Output Ratings

Motor Output Rating	11 kW (15 HP)
Output Voltage	0 – Supply Voltage
Output Current	24 A

## Cable Information

Max Supply Cable Size	8 mm <sup>2</sup> (0.01 sq in)
Max Motor Cable Size	8 mm <sup>2</sup> (0.01 sq in)
Max Motor Cable Length	100 m (328 ft)

## Factory Build Options

EMC Filter	Internal EMC
Brake Transistor	Internal
Enclosure	IP20
Display	TFT Display
PCB Coating	Standard


## Dimensions

Size	3
Height	261 mm (10.28 in)
Width	131 mm (5.16 in)
Depth	205 mm (8.07 in)
Weight	3.5 kg (7.72 lbs)
Fixings	4 x M4

## Packaged Dimensions


Height	325 mm (12.8 in)
Width	165 mm (6.5 in)
Depth	260 mm (10.24 in)
Weight	3.7 kg (8.16 lbs)




 **Buy this drive or get more information**  
Find your local sales partner on [invertekdrives.com](http://invertekdrives.com)



# How we measure our drives and packaging

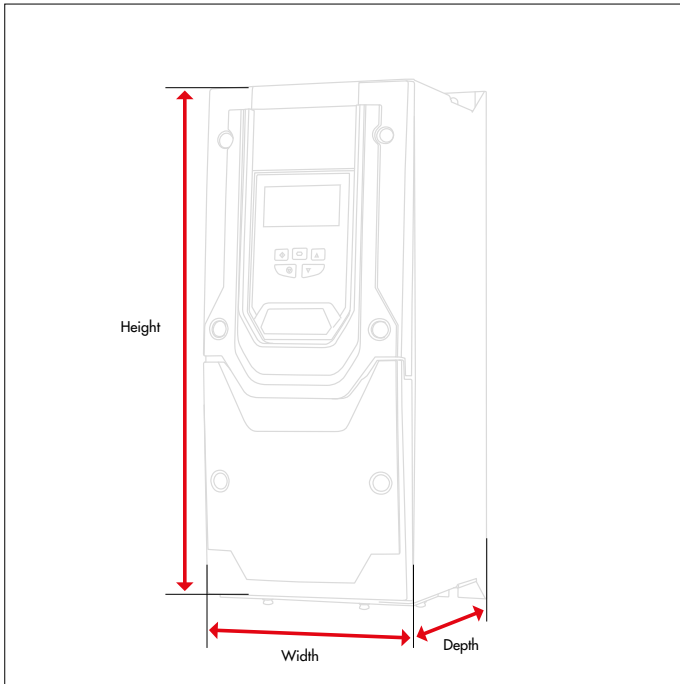

Drive Dimensions

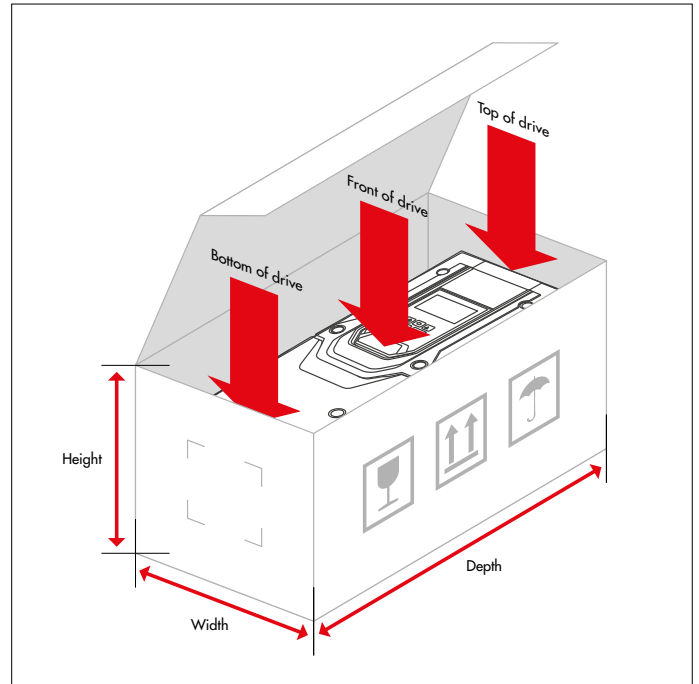

Packaging Dimensions



**Buy this drive or get more information**

Find your local sales partner on  
[invertekdrives.com](http://invertekdrives.com)

